

nuovo modello  
new model

# LA 125







ESPRESSO, ELEVATED.

LA 125 È LA NUOVA MACCHINA PER CAFFÈ ESPRESSO PROGETTATA PER DEFINIRE UNA NUOVA GENERAZIONE DI PERFORMANCE, STILE E SOSTENIBILITÀ NEL MONDO PROFESSIONALE, PENSATA PER BARISTI E COFFEE SHOP CONTEMPORANEI. INTERPRETA UNA VISIONE MODERNA, DOVE ESTETICA E FUNZIONALITÀ SI FONDONO IN EQUILIBRIO PERFETTO. IL DESIGN RIPRENDE LO SPIRITO DELLA STORICA SERIE "100" E LO REINTERPRETA IN CHIAVE MODERNA: LINEE NETTE INCONTRANO FORME ARMONIOSE, MENTRE INSERTI METALLICI E PANNELLI LATERALI IN ALLUMINIO PRESSOFUSO VERNICIATO TRASMETTONO SOLIDITÀ E RAFFINATEZZA.

LA 125 IS THE NEW ESPRESSO MACHINE DESIGNED TO DEFINE A NEW GENERATION OF PERFORMANCE, STYLE, AND SUSTAINABILITY IN THE PROFESSIONAL COFFEE WORLD - CREATED FOR CONTEMPORARY BARISTAS AND COFFEE SHOPS. IT EMBODIES A MODERN VISION WHERE AESTHETICS AND FUNCTIONALITY MERGE IN PERFECT BALANCE. THE DESIGN CAPTURES THE SPIRIT OF THE ICONIC "100" SERIES AND REINTERPRETS IT IN A MODERN WAY: CLEAN LINES MEET HARMONIOUS SHAPES, WHILE METALLIC INSERTS AND POWDER-COATED DIE-CAST ALUMINUM SIDE PANELS CONVEY SOLIDITY AND REFINEMENT.

**COLORI DI SERIE, finitura liscia**  
STANDARD COLOURS, smooth finishing

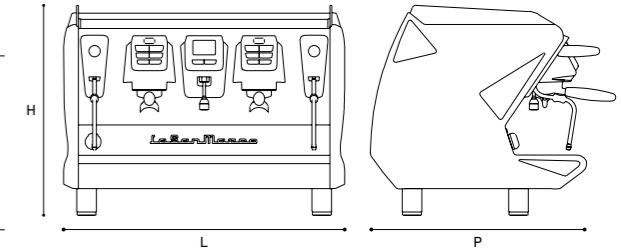

## LISTINO / PRICE LIST

VERSIONE VERSION	n.gruppi n. groups	caldaia boiler (l)	dimensioni dimensions (mm LxPxH)	peso netto net weight (kg)	potenza riscaldante (W) heating power (W)		pompa interna built-in pump (W)	altezza gruppi da beccuccio standard a griglia groups height from portafilter standard spout to drip tray grid
					monofase single ph.	trifase three-ph.		
Single Boiler	2	12	745x575x560	65	4500 (3500*)		275	Standard 80 mm Tall Cup 120 mm**
	3	19	985x575x560	78	5500	7000 (5500*)	275	
Multi Boiler	2	12+2x0.4	745x575x560	65	2x1250+2800		275	Standard 80 mm Tall Cup 120 mm**
	3	12+3x0.4	985x575x560	78	3x1250+3500		275	

### DI SERIE INCLUDED

Diametro portafiltro selezionabile: Ø 54 / Ø 58 mm  
Selectable portafilter diameter: Ø 54 / Ø 58 mm

### SISTEMA PID / PID SYSTEM

Illuminazione piano lavoro a LED  
LED work surface lighting

### ACCESSORI OPTIONAL

FTL (due rubinetti vapore) (two steam valves)

LANCIA VAPORE FREDDA (due lance)  
COOL TOUCH STEAM WAND (two wands)

SCALDATAZZE  
CUP WARMER

SET MANIGLIE LEGNO (applicabili esclusivamente all'intera macchina)  
WOODEN HANDLES SET (applicable only to the entire machine)

\* Resistenze depotenziate su richiesta / Derated heating elements on request

\*\* Alzatine di serie per versioni Tall Cup  
Cup risers included with the Tall Cup versions



gallery

LA 125