

LA D.



TECNOLOGIA ED ELEGANZA AL SERVIZIO DEL BARISTA TECHNOLOGY AND ELEGANCE AT THE SERVICE OF THE BARISTA

IL MODELLO D. UNISCE IL DESIGN ICONICO DELLA COLLEZIONE ALLA TECNOLOGIA AVANZATA, OFFRENDO MODELLI ADATTI A OGNI ESIGENZA:


- CON CALDAIA SINGOLA E SCAMBIATORI DI CALORE, GARANTISCE UNA GESTIONE INDIPENDENTE DELLA TEMPERATURA PER OGNI GRUPPO GRAZIE AL SISTEMA MECCANICO IGTS (INDIVIDUAL GROUP TEMPERATURE SETTING).
- CON TECNOLOGIA MULTI BOILER, CONSENTE REGOLAZIONI DI TEMPERATURA ESTREMAMENTE PRECISE PER UN'ESTRAZIONE PERSONALIZZATA, IMPOSTABILE INDIPENDENTEMENTE PER OGNI DOSE DI OGNI GRUPPO EROGATORE.
- CON TECNOLOGIA MULTI BOILER VARIABLE INTEGRA IL PRESSURE PROFILING, PER IL CONTROLLO DIGITALE DELLE PRESSIONI E DELLE CURVE DI TEMPERATURA, ESALTANDO AL MASSIMO OGNI CAFFÈ SPECIALTY. TUTTE LE VERSIONI SONO DISPONIBILI CON TASTIERA MECCANICA O DISPLAY TOUCH PER UN ACCESSO RAPIDO E INTUITIVO ALLA PROGRAMMAZIONE DELLA MACCHINA.

D. MODEL COMBINES THE COLLECTION'S ICONIC DESIGN WITH ADVANCED TECHNOLOGY, OFFERING MODELS TAILORED TO EVERY NEED:

- *WITH A SINGLE BOILER AND HEAT EXCHANGERS, IT ENSURES INDEPENDENT TEMPERATURE MANAGEMENT FOR EACH GROUP THANKS TO THE IGTS MECHANICAL SYSTEM (INDIVIDUAL GROUP TEMPERATURE SETTING).*
- *WITH MULTI BOILER TECHNOLOGY, IT ALLOWS EXTREMELY PRECISE TEMPERATURE ADJUSTMENTS FOR A FULLY CUSTOMIZED EXTRACTION, INDEPENDENTLY CONFIGURABLE FOR EACH DOSE OF EVERY BREWING GROUP.*
- *WITH MULTI BOILER VARIABLE TECHNOLOGY, IT INTEGRATES PRESSURE PROFILING FOR DIGITAL CONTROL OF PRESSURE AND TEMPERATURE CURVES, MAXIMIZING THE PERFORMANCE OF EVERY SPECIALTY COFFEE. ALL VERSIONS ARE AVAILABLE WITH A MECHANICAL KEYPAD OR TOUCH DISPLAY FOR QUICK AND INTUITIVE ACCESS TO MACHINE PROGRAMMING.*



COLORI DI SERIE STANDARD COLOURS



bianco perla
pearl white




verde British
British green



marrone caffè
coffee brown



nero opaco
matt black

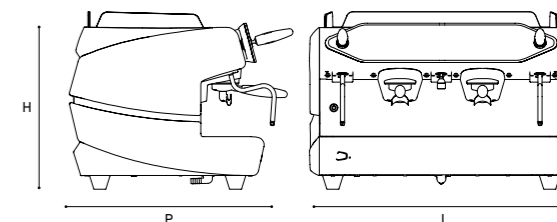

LISTINO / PRICE LIST

VERSIONE VERSION	n. gruppi n. groups	caldaia boiler (l)	dimensioni dimensions (mm LxPxH)	peso netto net weight (kg)	potenza riscaldante (W) heating power (W)		pompa interna built-in pump (W)	altezza gruppi da beccuccio standard a griglia groups height from portafilter standard spout to drip tray grid
					monofase single ph.	trifase three-ph.		
Single Boiler Standard (1)	2	12	765x570x545	72	4500 (3500*)	4500 (3500*)	275	Standard 80 mm
	3	19	1005x570x545	88	5500	7000 (5500*)		
Single Boiler Tall Cup (1)	2	12	765x570x580	72	4500 (3500*)	4500 (3500*)	275	Tall Cup 145 mm Con alzatine/With cup risers 70-90 mm
	3	19	1005x570x580	88	5500	7000 (5500*)		
Multi Boiler Standard (2)	2	12+2x0,4	765x570x545	72	5500	5500	275	Standard 80 mm
	3	12+2x0,4	1005x570x545	88	7250	7250		
Multi Boiler Tall Cup (2)	2	12+2x0,4	765x570x580	72	5500	5500	275	Tall Cup 145 mm Con alzatine/With cup risers 70-90 mm
	3	12+2x0,4	1005x570x580	88	7250	7250		
Multi Boiler Variable Standard (3)	2	12+2x0,4	765x570x545	72	5500	5500	275	Standard 80 mm
	3	12+2x0,4	1005x570x545	88	7250	7250		
Multi Boiler Variable Tall Cup (3)	2	12+2x0,4	765x570x580	72	5500	5500	275	Tall Cup 145 mm Con alzatine/With cup risers 70-90 mm
	3	12+2x0,4	1005x570x580	88	7250	7250		

DI SERIE INCLUDED

Diametro portafiltro selezionabile: Ø 54 / Ø 58 mm
Selectable portafilter diameter: Ø 54 / Ø 58 mm

SISTEMA PID / PID SYSTEM

Copertura coibentazione caldaia
Boiler insulation coating

Illuminazione piano lavoro a LED
LED work surface lighting

ACCESSORI OPTIONAL

FTL (due rubinetti vapore) (two steam valves)

LANCIA VAPORE FREDDA (due lance)
COOL TOUCH STEAM WAND (two wands)

BLUETOOTH REMOTE CONTROL APP
BLUETOOTH REMOTE CONTROL APP

SCALDATAZZE / CUP WARMER

LANCIA VAPORE AUTOMATICA autosteam (solo lato sx)
AUTOMATIC STEAM WAND autosteam (left side only)

SET MANIGLIE LEGNO (applicabili esclusivamente all'intera macchina)
WOODEN HANDLES SET (applicable only to the entire machine)

- (1) Caldaia singola con sistema IGTS / Single Boiler with IGTS system
- (2) Multi Boiler con profilo di temperatura (senza profilo di pressione)
Multi Boiler temperature profiling (without pressure profiling)
- (3) Multi Boiler con profili di pressione e temperatura
Multi Boiler with pressure and temperature profiling
- * Resistenze depotenziate su richiesta / Derated heating elements on request



gallery